


# DS 1220 FS



# The Solution for All Fine Dust

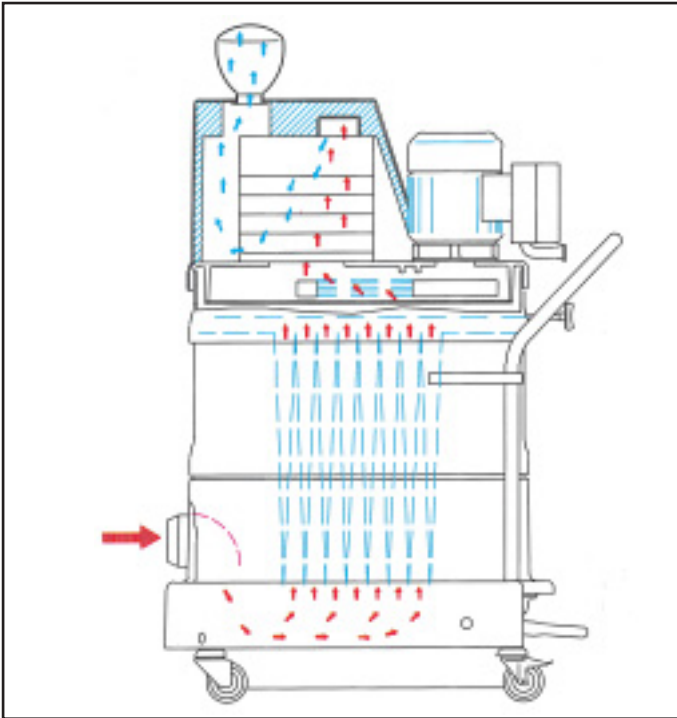

Easy to use thanks to foot bar emptying method



	DS 1220
Engine Power (kW)	2,2
Voltage (Volts)	400
Vacuum (mbar)	125
*1 Air extraction (m³/h)	300
Filter area (m²)	2,6
Spec. Filter area load (m³·m²·h⁻¹)	115
Weight (kg)	80

\*) Net suction power as per BIA: measured with 3m hose and clogged filter

- Low filter area load, leading to long useful life
- Filter with PTFE coating
- Extremely strong, corrosion-proof GRP body
- Modular system, can be upgraded at any time
- Highly compact: L 850 x W 520 x H 1400mm (excluding residual dust filter, incl. outlet bag)
- Completely inclusive soundproofing
- Suitable for round-the-clock operation

- Complies with EN 60335-2-69 as IS and EOB/IS in dust classes: L, M and H
- Complies with ATEX 100a as DUST-EX in dust classes: L, M and H
- Complies with ATEX 100a as GAS-EX in dust classes: L, M and H